



General Features

- Head can be tilted to the left and fixed at 45°
- Zero surface with no elevation difference to prevent sawdust from entering
- Cutting at standard angles and any intermediate angles
- Made by special aluminium (sigma) profile support miter system
- User friendly clamp. Can be tilted to any direction, tightened with one move




Standard

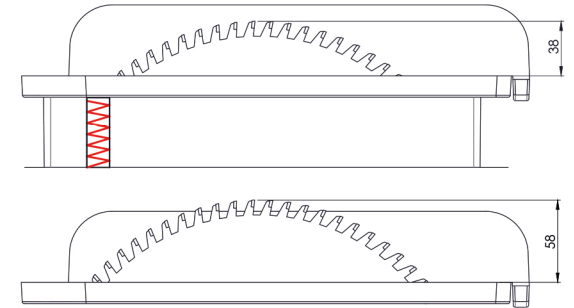
- 1 pc. mechanic clamp
- 1 unit support

Optional

- Saw blade
- Additional profile in desired length
- Clamp set
- 3-Phase motor

Technical Table

				
0,8kW 230 V/50-60Hz 12kW-400V	D=305 mm d=30/32 mm	3000 r.p.m.	56x43x36 cm W x L x H	28 kg



Cutting Diagram

Alya Ø305 mm

